

IP 20

PF
 $\lambda \geq 0,96$


M

M

F


$t_a -10^{\circ} \div +40^{\circ}C$

31 mm



Part Number	Input I typ	Input Vmin	Input Vmax	Detection Area @3m	Output	Dimensions A x B x C	Dimensions D x E x F
A40DASE3000B	12mA	12V	20V	107° x 8m	DALI2 Broadcast	35 x 31 x 14	114 x 22 x 19

DASE3B00B

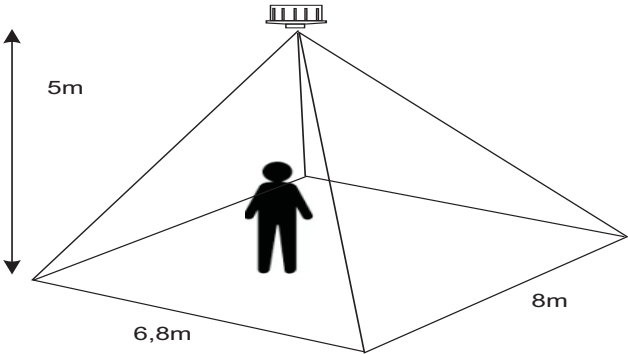

Datasheet download

Lente sensore a 64 zone 106° x 97°
Sensor lense with 64 zones 106° x 97°


Sensore PIR DALI2

- Sensore PIR DALI
- Alimentazione tramite linea DALI max 12mA
- Compatibile con sistemi DALI1 e DALI2
- Software broadcast
- Broadcast: Non necessita programmazione
- Installazione ad incasso
- Specifico per cartongesso, legno, alluminio.
- Adatto a portafaretti ø35mm MR11


Sensor PIR DALI2

- DALI PIR sensor with light sensor
- Power supply via DALI Bus max 12mA
- Compatible with DALI1 and DALI2 protocols
- Software broadcast
- Broadcast: Ready to work (no programming needed)
- Built in installation
- Specific for being installed in plasterboard, wood and aluminum
- Suitable to be incorporated in ø35mm MR16 fixtures.






Legno\Cartongesso
Wood\Plasterboard

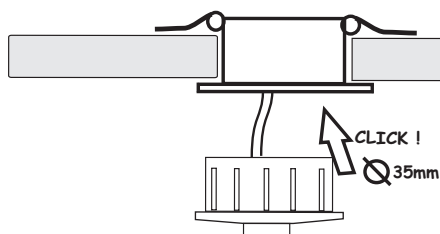

Portafaretto diametro 35mm MR 11
MR 11 holder 35mm diameter

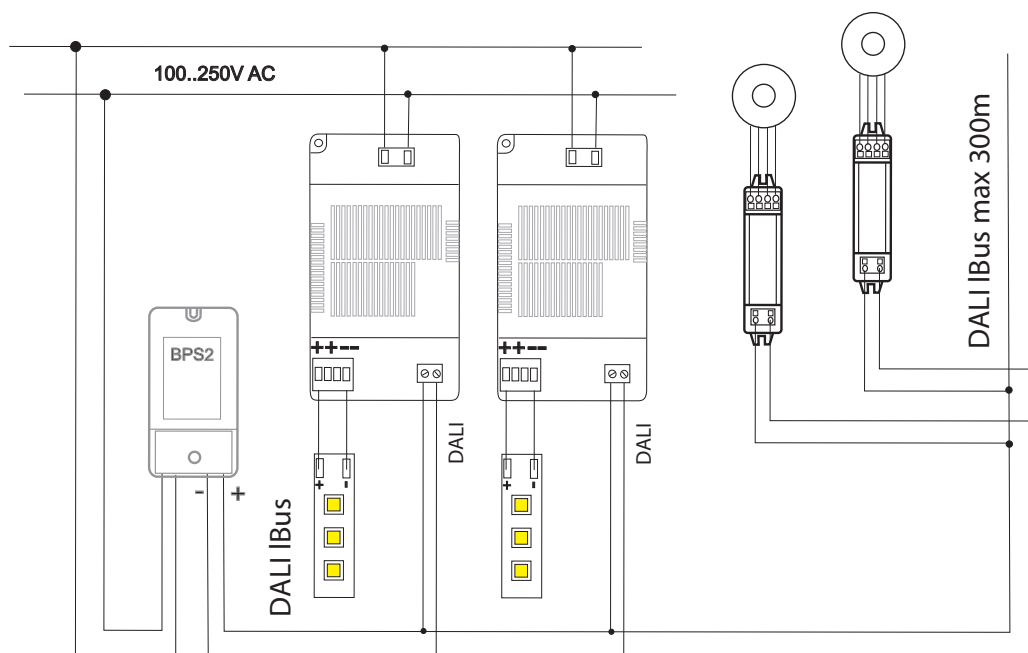

Nota:*Smart Broadcast DASE3B

Permette di collegare più dispositivi DASE2B Broadcast sulla stessa linea, tutti sincronizzati tra loro grazie ad un software speciale.

Grazie al funzionamento in Broadcast non è necessario programmare il sistema, né utilizzare un dispositivo Master Dali.

Nota:*Smart Broadcast DASE3B

It allows you to connect multiple Broadcast devices DASE2B on the same line; they all remain synchronized thanks to a special software. The broadcast signal allows operation without the need for system programming and without a Dali Master device.