


Ultrathin Series
FIX
SLT100-12VFG
SLT100-24/48VFG-UN



Dimensions: (mm/inch)

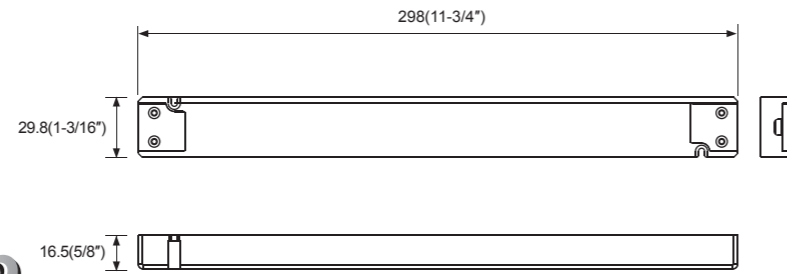

- Independent power supply for constant voltage LED lamp
- Class II protection against electric shock from direct and indirect contact
- Start-up time $\leq 0.5s$
- No load power consumption $\leq 0.5W$
- Open circuit, short circuit, over load and over temperature protection
- Auto restart after removal of fault condition (except OTP)
- ECO design, comply with ERP directives
- Warranty : 5 Years


Specifications

| Model | Rated input | PF | Output | Output Power range | Output voltage range | Tolerance | Efficiency | ta | tc | Size | Approval |
|-----------------|-------------|------|--------|---------------------------|----------------------|-----------|------------|----------|------|---|--------------|
| SLT100-12VFG | AC220-240V | 0.95 | 12VDC | 0-96W | - | +/-5% | 92.0% | -20-45 C | 90 C | 298×29.8×16.5mm (11-3/4"×1-3/16"×5/8") | CE |
| SLT100-24VFG-UN | AC120-240V | 0.95 | 24VDC | 0-100W@240V 0-80W@120V | - | +/-5% | 92.3% | -20-45 C | 90 C | 298×29.8×16mm (11-3/4"×1-3/16"×5/8") | CE, UL, SELV |
| SLT100-48VFG-UN | AC120-240V | 0.95 | 48VDC | 0-100W@240V 0-80W@120V | - | +/-3% | 92.3% | -20-45 C | 90 C | 298×29.8×16mm (11-3/4"×1-3/16"×5/8") | CE, UL, SELV |

Ultrathin Series
FIX
SLT200-24/48VFG-UN



Dimensions: (mm/inch)

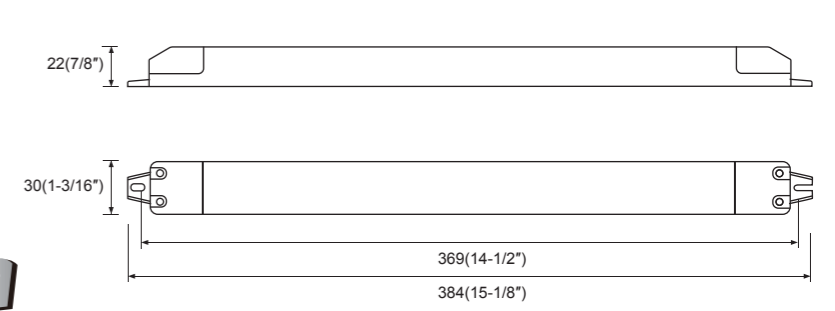

- Independent power supply for constant voltage LED lamp
- Class II protection against electric shock from direct and indirect contact
- Ultraslim design only 22mm on height
- Start-up time $\leq 0.5s$
- No load power consumption $\leq 0.5W$
- Open circuit, short circuit, over load and over temperature protection
- Auto restart after removal of fault condition (except OTP)
- ECO design, comply with ERP directives
- Warranty : 5 Years

Specifications

| Model | Rated input | PF | Output | Output Power range | Output voltage range | Tolerance | Efficiency | ta | tc | Size | Approval |
|-----------------|-------------|------|--------|--------------------------------|----------------------|-----------|------------|----------|------|---------------------------------------|----------|
| SLT200-24VFG-UN | AC120-240V | 0.95 | 24VDC | 0-150W@120V 0-200W@220-240V | - | +/-5% | 94.0% | -20-45 C | 90 C | 384×30×22mm (15-1/8"×1-3/16"×7/8") | UL, SELV |
| SLT200-48VFG-UN | AC120-240V | 0.95 | 48VDC | 0-150W@120V 0-200W@220-240V | - | +/-5% | 94.0% | -20-45 C | 90 C | 384×30×22mm (15-1/8"×1-3/16"×7/8") | UL, SELV |


Ultrathin Series

FIX

SLT250-24/48VFG-EU



Dimensions: (mm/inch)

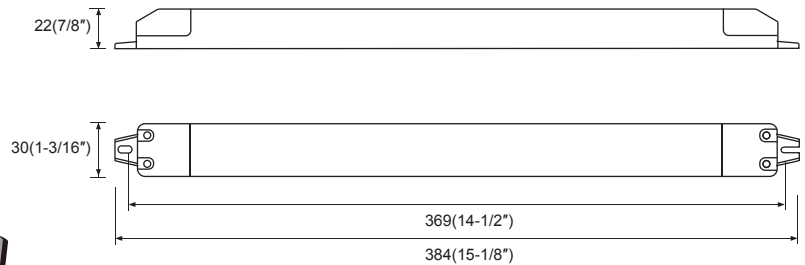

- Independent power supply for constant voltage LED lamp
- Class II protection against electric shock from direct and indirect contact
- Ultrathin design only 22mm on height
- Start-up time ≤0.5s
- No load power consumption ≤0.5W
- Open circuit, short circuit, over load and over temperature protection
- Auto restart after removal of fault condition (except OTP)
- ECO design, comply with ERP directives
- Warranty : 5 Years

Specifications

| Model | Rated input | PF | Output | Output Power range | Output voltage range | Tolerance | Efficiency | ta | tc | Size | Approval |
|-----------------|-------------|------|--------|--------------------|----------------------|-----------|------------|----------|------|---------------------------------------|-----------------|
| SLT250-24VFG-EU | AC220-240V | 0.95 | 24VDC | 30-250W | - | +/-3% | 94.0% | -20-40 C | 90 C | 384×30×22mm (15-1/8"×1-3/16"×7/8") | SELV CE pending |
| SLT250-48VFG-EU | AC220-240V | 0.95 | 48VDC | 30-250W | - | +/-3% | 94.0% | -20-40 C | 90 C | 384×30×22mm (15-1/8"×1-3/16"×7/8") | SELV CE pending |