




Part Number	CCT (K)	Lumen/m	Ra	LED/m	V (Typ)	Cut	W/m	IP	EEC*
A41A2411CA27	2700K	970	96	112	24V/DC	71,4mm	10W	IP65	F
A41A2411CA30	3000K	1000	96	112	24V/DC	71,4mm	10W	IP65	F
A41A2411CA40	4000K	1080	97	112	24V/DC	71,4mm	10W	IP65	F
A41A2411CA65	6500K	1110	96	112	24V/DC	71,4mm	10W	IP65	F
A41A2416CA27	2700K	1430	96	160	24V/DC	50mm	14,4W	IP65	F
A41A2416CA30	3000K	1440	96	160	24V/DC	50mm	14,4W	IP65	F
A41A2416CA40	4000K	1590	97	160	24V/DC	50mm	14,4W	IP65	F
A41A2416CA65	6500K	1710	95	160	24V/DC	50mm	14,4W	IP65	F
A41A2424CA27	2700K	2060	97	240	24V/DC	33,3mm	21,6W	IP65	F
A41A2424CA30	3000K	2100	97	240	24V/DC	33,3mm	21,6W	IP65	F
A41A2424CA40	4000K	2380	97	240	24V/DC	33,3mm	21,6W	IP65	F
A41A2424CA65	6500K	2430	95	240	24V/DC	33,3mm	21,6W	IP65	F

** The EEC specification refers in each case to the installed light source(s)

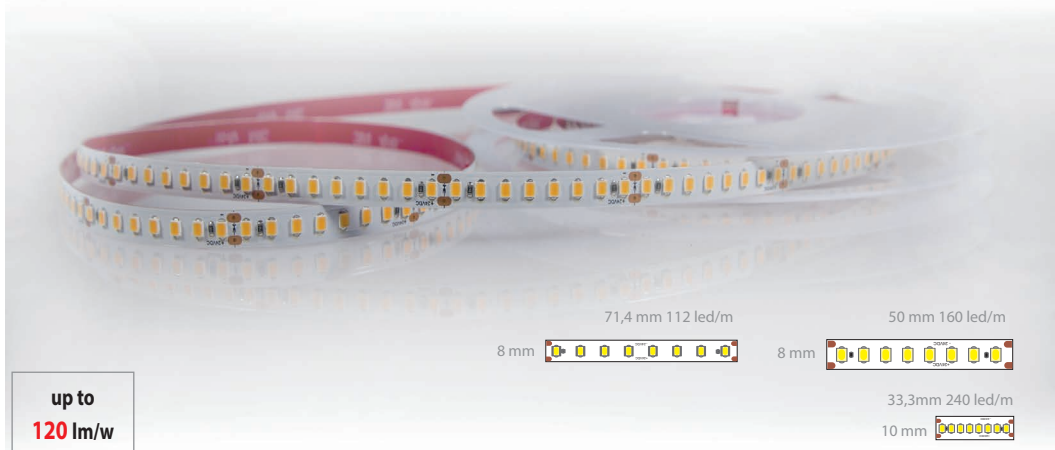

Datasheet download

Strisce flessibili a LED 24V autoadesive IP65

- Elevato CRI Ra>95
- 112 led/m - 10W/m - LED2835
- 160 led/m - 14,4W/m - LED2835
- 240 led/m - 21,6W/m - LED2835
- Superiore durata nel tempo, adesivo resistente 3M VHB
- Disponibile nei colori standard 2700K, 3000K, 4000K e 6500K
- Fornite in nastro da 5m e cavetto di raccordo.

24V Flexible adhesive LED strips IP65

- High CRI Ra>95
- 112 led/m - 10W/m - LED2835
- 160 led/m - 14,4W/m - LED2835
- 240 led/m - 21,6W/m - LED2835
- High life time - Fitted with high resistant 3M VHB adhesive tape
- Available in standard 2700K, 3000K, 4000K e 6500K
- Supplied in 5m roll with connecting cable