

12/20  
Watt/m

IP 65


CRI>80



t<sub>a</sub> -10° ÷ +40°C



up to  
**140 lm/w**

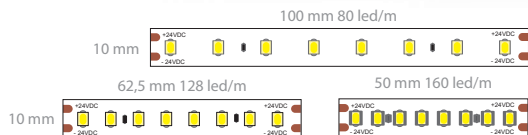

| Part Number  | CCT (K) | Lumen/m | Ra | LED/m | V (Typ) | Cut    | W/m | IP   | EEC* |
|--------------|---------|---------|----|-------|---------|--------|-----|------|------|
| A41B24080A27 | 2700K   | 1460    | 84 | 80    | 24V/DC  | 100mm  | 12W | IP65 | E    |
| A41B24080A30 | 3000K   | 1590    | 87 | 80    | 24V/DC  | 100mm  | 12W | IP65 | E    |
| A41B24080A40 | 4000K   | 1690    | 87 | 80    | 24V/DC  | 100mm  | 12W | IP65 | E    |
| A41B24128A27 | 2700K   | 1950    | 85 | 128   | 24V/DC  | 62,5mm | 16W | IP65 | E    |
| A41B24128A30 | 3000K   | 2040    | 89 | 128   | 24V/DC  | 62,5mm | 16W | IP65 | E    |
| A41B24128A40 | 4000K   | 2260    | 88 | 128   | 24V/DC  | 62,5mm | 16W | IP65 | E    |
| A41B24160A27 | 2700K   | 2380    | 84 | 160   | 24V/DC  | 50mm   | 20W | IP65 | E    |
| A41B24160A30 | 3000K   | 2540    | 88 | 160   | 24V/DC  | 50mm   | 20W | IP65 | E    |
| A41B24160A40 | 4000K   | 2840    | 88 | 160   | 24V/DC  | 50mm   | 20W | IP65 | E    |

\*\* The EEC specification refers in each case to the installed light source(s)



Datasheet download

### Strisce flessibili a LED 24V autoadesive IP65

- LED 2835 ad alta efficienza e a bassa caduta di tensione
- Realizzata in moduli da 8 LED per una diminuzione delle perdite in calore e migliore resa luminosa
- Consumo ridotto, alto rendimento
- Disponibile nei colori standard 2700K, 3000K e 4000K
- Fornite in nastro da 5m e cavetto di raccordo.

### 24V Flexible adhesive LED strips IP65

- LED 2835 with high lumen efficiency and low voltage drop
- 8LED segment for a reduction of heat losses and higher lumen efficiency
- Reduced consumption, higher efficiency
- Available in standard 2700K, 3000K and 4000K
- Supplied in 5m roll with connecting cable

