

264
Watt



IP 20




EMC



110

SELV

ta -10°÷ +45°C



Part Number	Input V min	Input V max	Output I max	Output V max	W	Dimensions A x B x C	Protocol
A40DICUBE24N	24V/DC	24V/DC	11A	Vin-0,5V	264W	41 x 47 x 20	PUSH / 0-10V



input selector



input selector

1	2	Mode
OFF	OFF	Push / Slave
OFF	ON	Push Memory
ON	OFF	0..10V
ON	ON	1..10V



Datasheet download


Interfaccia PUSH / 0-10V / 1-10V

- Comando pulsante, 0-10V o 1-10V
- Alimentazione: 24V/DC
- Ingresso PUSH bassa tensione. Possibile sincronizzazione fino a 10 dispositivi.
- Con memoria di stato
- Comanda carichi resistivi fino a 11A
- Uscita PWM 750Hz

PUSH / 0-10V/ 1-10V interface


- Dimming control by PUSH, 0-10V or 1-10V
- Input: 24V/DC
- Low voltage PUSH input. Possible synchronization up to 10 devices.
- State memory
- For resistive loads up to 11A
- PWM 750Hz output



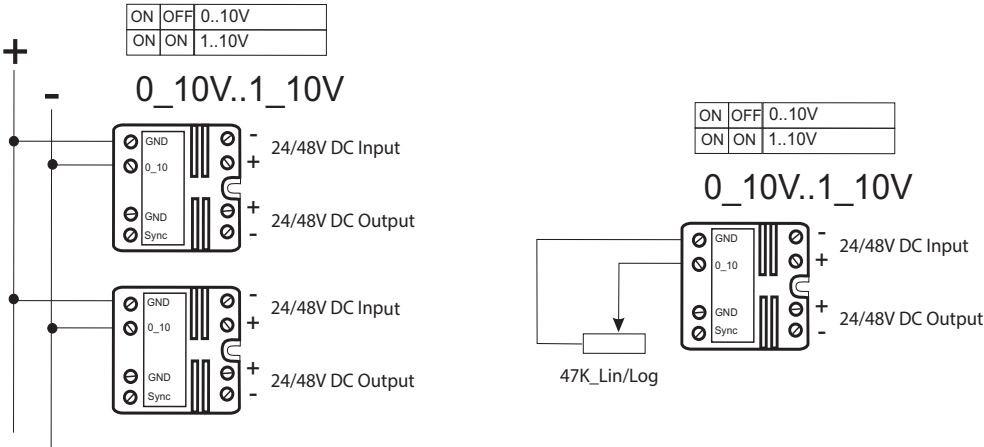

Push

Push Button low voltage

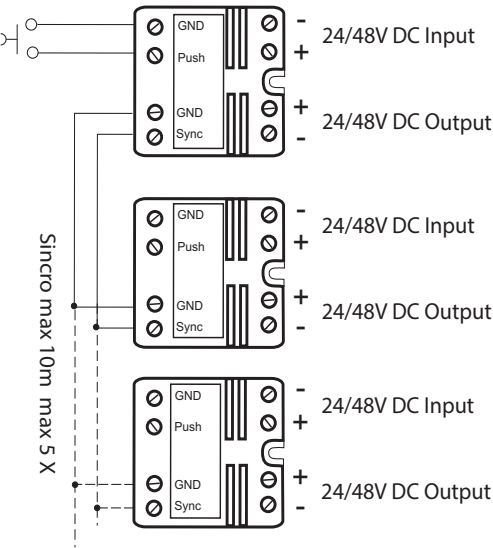

Master

1	2	Mode
OFF	OFF	Push
OFF	ON	Push Memory

Slave

1	2	Mode
OFF	OFF	Push

Slave

1	2	Mode
OFF	OFF	Push