


Dimmable LED drivers – PBS – Dimmable DALI/1 – 10V/0 – 10V/PUSH

Constant voltage dimmable LED driver / Alimentatore dimmerabile per LED a tensione costante

Made in Italy 

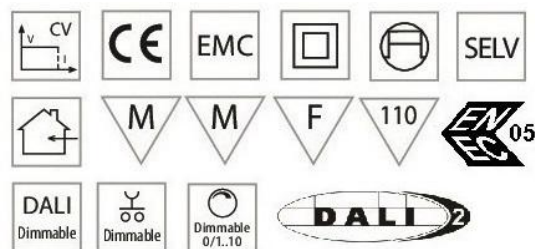

Part number Codice prodotto	P out W @230V	P out W @110V	V out DC ±5%	I out DC max @230V	I out DC max @110V	λ Power Factor	Efficiency in full-load @230V	Efficiency in full-load @110V	tc °C	Mark
A40PBS060D0B	60	35	24	2,5 A	1,45 A	0,96	91%	88%	75	ENEC 05 pending
A40PBS075D0B	75	50	24	3,12 A	2,1 A	0,96	92%	89%	70	/
A40PBS100D0B	100	50	24	4,16 A	2,1 A	0,96	92%	91%	75	ENEC 05 pending

Features

- IP20 independent LED driver
- Supplied with terminal cover and cable retainer
- Class II protection against electric shock for direct or indirect contact

Caratteristiche

- Alimentatore LED indipendente IP20
- Fornito di coprimorsetto e serracavo
- Protezione in classe II contro le scosse elettriche per contatti diretti e indiretti

Directives / Direttive:

2014/35/EU (LVD); 2014/30/EU (EMC); RoHs 2011/65/EU + 2015/863/EU (RoHs); 2009/125/ECODESIGN regulation (EU) n°2019/2020 and 341/2021 amendment

Standards compliance: Conformità alle norme:

EN 61347-2-13:2024; EN 61347-1:2024
EN IEC 62384:2020
EN 55015:2019 + A11:2020; EN 61000-3-3:2013; EN 61457:2009;
EN IEC 61000-3-2:2019 + A1:2021
EN 63000:2018
EN IEC 62442-3:2022
IEC 62386-102:2014 + AMD1:2018; IEC 62386-207:2018



Dimmable LED drivers – PBS – Dimmable DALI/1 – 10V/0 – 10V/PUSH

Constant voltage dimmable LED driver / Alimentatore dimmerabile per LED a tensione costante

Made in Italy 


Other electrical data	
Nominal input voltage AC	220-240 V
Mains frequency	50/60 Hz
iTHD (60 W)	12%
iTHD (75 W / 100 W)	5%
Inrush current (60 W)	20 A, 20 μ s
Inrush current (75 W / 100 W)	11 A, 320 μ s
Surge capability (L-N)	> 1 kV
Nominal output voltage DC	24 V $\pm$ 5%
Output PWM frequency	1 kHz
Minimum output load	10 W
Output voltage ripple (100 Hz)	< 5%
Standby power (Psb)	$\leq$ 0,5 W
Networked stanby power (Pnet)	$\leq$ 0,5 W
No-load proof	YES
Intended for no-load operation	NO
Output PstLM (Flicker value)	$\leq$ 1
Output SVM (Stroboscopic effects value)	$\leq$ 0,4
Insulation primary/secondary:	Class II SELV 3750V AC
Leakage current:	< 0,5 mA
Temperatures and operating conditions	
Ambient temperature range	-10...+40 °C
Storage temperature range	-15...+50 °C
Capabilities	
Dimmable	YES
Dimming interface	DALI-2 / 0-10V / 1-10V / PUSH-BUTTON
Input selector	Dip-switch
Protections	Open load, short-circuit, overload, overtemperature
Connections	
Cables cross-section (input side)	0,5-2,5 mm ² , 13-20 AWG
Wire preparation lenght (input side)	4...7 mm
Cables cross-section (output side)	0,5-2,5 mm ² , 13-20 AWG
Wire preparation lenght (output side)	4...7 mm
Connections	0,5-2,5 mm ² screw or fast connectors
Max cables lenght for push-button line	20m, $\varnothing$ 0,5-2,5 mm ²
Nominal life-time	50000h @Ta 40 °C

Dimmable LED drivers – PBS – Dimmable DALI/1 – 10V/0 – 10V/PUSH

Constant voltage dimmable LED driver / Alimentatore dimmerabile per LED a tensione costante

Made in Italy 

Product dimensions

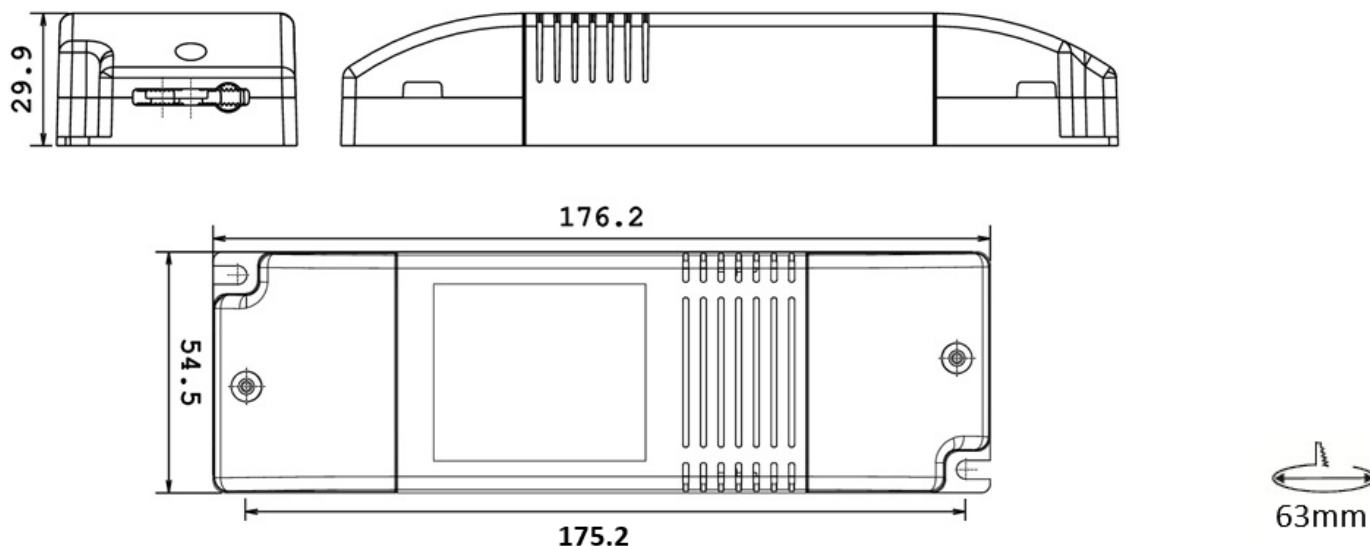

Color & materials

Casing material:	Polycarbonate V0
Color	White

Product weight

A40PBS060D0B	175 gr.
A40PBS075D0B	175 gr.
A40PBS100D0B	195 gr.