

4,8/19,2
Watt/m



IP 20


CRI>80





EMC



ta -10°÷ +40°C

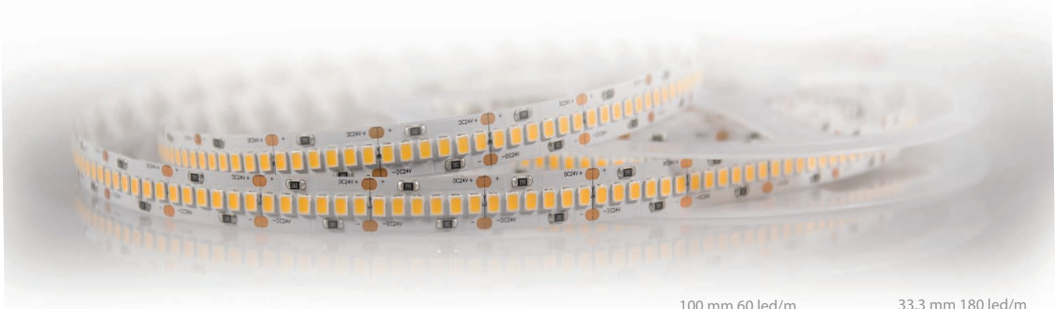

up to
120 lm/w

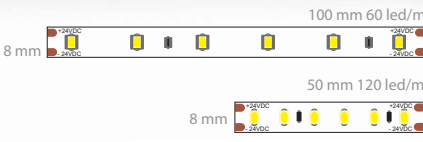

Part Number	CCT (K)	Lumen/m	Ra	LED/m	V (Typ)	Cut	W/m	IP	EEC*
A41ES2460030	3000K	540	86	60	24V/DC	100mm	4,8W	IP20	F
A41ES2460040	4000K	560	88	60	24V/DC	100mm	4,8W	IP20	F
A41ES2412030	3000K	1050	86	120	24V/DC	50mm	9,6W	IP20	F
A41ES2412040	4000K	1120	88	120	24V/DC	50mm	9,6W	IP20	F
A41ES2418030	3000K	1550	86	180	24V/DC	33,3mm	14,4W	IP20	F
A41ES2418040	4000K	1630	88	180	24V/DC	33,3mm	14,4W	IP20	F
A41ES2424030	3000K	2060	86	240	24V/DC	25mm	19,2W	IP20	F
A41ES2424040	4000K	2160	88	240	24V/DC	25mm	19,2W	IP20	F

** The EEC specification refers in each case to the installed light source(s)



Datasheet download

- Strisce flessibili a LED 24V autoadesive IP20**
- LED 2835
 - Consumo ridotto
 - Disponibile nei colori standard 3000K e 4000K
 - Fornite in nastro da 5m e cavetto di raccordo.

- 24V Flexible adhesive LED strips IP20**
- LED 2835
 - Reduced consumption
 - Available in standard 3000K and 4000K
 - Supplied in 5m roll with connecting cable

