

4,8/14,4
Watt/m

IP 20

CRI>80




t_a -10° ÷ +40°C



Datasheet download



up to
140 lm/w

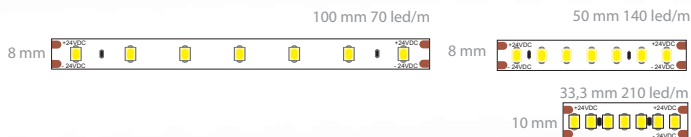

Part Number	CCT (K)	Lumen/m	Ra	LED/m	V (Typ)	CuT	W/m	IP	EEC*
A41H24070A24	2400K	500	89	70	24V/DC	100mm	4,8W	IP65	F
A41H24070A27	2700K	580	85	70	24V/DC	100mm	4,8W	IP65	E
A41H24070A30	3000K	610	89	70	24V/DC	100mm	4,8W	IP65	E
A41H24070A40	4000K	670	88	70	24V/DC	100mm	4,8W	IP65	E
A41H24070A60	6000K	670	91	70	24V/DC	100mm	4,8W	IP65	E
A41H24140A27	2700K	1130	85	140	24V/DC	50mm	9,6W	IP65	F
A41H24140A30	3000K	1140	89	140	24V/DC	50mm	9,6W	IP65	F
A41H24140A40	4000K	1280	88	140	24V/DC	50mm	9,6W	IP65	E
A41H24140A60	6000K	1290	91	140	24V/DC	50mm	9,6W	IP65	E
A41H24210A27	2700K	1610	85	210	24V/DC	33,3mm	14,4W	IP65	F
A41H24210A30	3000K	1710	88	210	24V/DC	33,3mm	14,4W	IP65	F
A41H24210A40	4000K	1860	88	210	24V/DC	33,3mm	14,4W	IP65	E
A41H24210A60	6000K	1810	91	210	24V/DC	33,3mm	14,4W	IP65	E

** The EEC specification refers in each case to the installed light source(s)

Strisce flessibili a LED 24V autoadesive IP65

- LED 2835 ad alta efficienza e a bassa caduta di tensione
- Realizzata in moduli da 7 LED per una diminuzione delle perdite in calore e migliore resa luminosa - Consumo ridotto, alto rendimento
- Disponibile nei colori standard 2700K, 3000K, 4000K e 6000K
- Fornite in nastro da 5m e cavetto di raccordo.

24V Flexible adhesive LED strips IP65

- LED 2835 with high lumen efficiency and low voltage drop
- 7LED segment for a reduction of heath losses and higher lumen efficiency - Reduced consumption, higher efficiency
- Available in standard 2700K, 3000K, 4000K and 6000K
- Supplied in 5m roll with connecting cable