

11÷21
Watt


V
I_a

PF
λ ≥ 0,85

IP 20



EMC





M

M

F


110

SELV


50 mm

t_a -10°÷+40°C


AC/DC




Part Number	I _{out}	V _{out} Led Min	V _{out} Led Max	V _{out} Led max @110V	U _{out}	W @230V	W @110V	Dimensions A x B x c
A40PDMC0000B	250÷700mA	6V/15V*	44V	44V	48V	21W	15W	138 x 40 x 28,5

* Non interrompere sul secondario - Do not interrupt secondary side

Po Max at 100-120VAC	Po Max at 200-250VAC	I _o	1	2	3	4
11W	11W	250mA	○	○	○	○
15W	15W	350mA	○	○	○	●
15W	17W	400mA	●	○	○	○
15W	19W	450mA	○	●	○	○
15W	21W	500mA	●	●	○	○
15W	21W	550mA	○	●	●	○
15W	21W	600mA	●	●	●	○
15W	21W	700mA	●	●	●	●

Before use, always check dipswitch settings

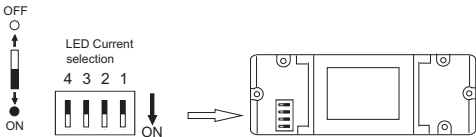

Datasheet download

Alimentatore multicorrente per LED di potenza

- Alimentatore indipendente - IP20 - Classe II di isolamento
- Uscita in corrente costante 250÷700mA, ±5%, programmabile con DIP-SWITCH (vedi schema)
- Protezione autoripristinante contro le sovratemperature, contro il circuito aperto ed i corto-circuiti sul secondario
- Pressacavo adatto a vari tipi di cavo, sia tondi che piatti
- Alimentazione : 110÷240V/AC- Uscita stabilizzata

Multicurrent driver for High Brightness LEDs

- Independent driver - IP20 - Insulation class II
- Output in steady current: 250÷700mA, ±5%, settable by DIP-Switches (see scheme)
- Self-resetting protection against overtemperatures, against open circuit and against output short circuits
- Cable clamp for flat and round cables
- Input voltage: 110÷240V/AC- Steady output.

