

6,3÷15
Watt


CC

PF
λ ≥ 0,6

CE

EMC





M

M

F

110


SELV

IP 20
IP 65


40 mm

ta -10°÷+40°C


AC/DC

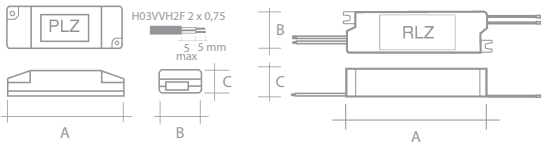

Part Number	Iout	Vout Led Min	Vout Led Max@230V	Vout Led max @110V	Uout	W @230V	W @110V	Dimensions A x B x c	IP
A40PLZ14000B	140mA	2,75	45	45	47V	6,3W	6,3W	122 x 33 x 19	IP20
A40PLZ35000B	350mA	2,75	40	31	47V	14W	11W	122 x 33 x 19	IP20
A40PLZ40000B	400mA	2,75	35	28	36V	14W	11W	122 x 33 x 19	IP20
A40PLZ50000B	500mA	2,75	22	17	24V	11W	8,4W	122 x 33 x 19	IP20
A40PLZ64000B	640mA	2,75	23	17	24V	15W	11W	122 x 33 x 19	IP20
A40RLZ14000B	140mA	2,75	45	45	47V	6,3W	6,3W	110 x 33 x 21	IP65
A40RLZ35000B	350mA	2,75	40	31	47V	14W	11W	110 x 33 x 21	IP65
A40RLZ40000B	400mA	2,75	35	28	36V	14W	11W	110 x 33 x 21	IP65
A40RLZ50000B	500mA	2,75	22	17	24V	11W	8,4W	110 x 33 x 21	IP65
A40RLZ64000B	640mA	2,75	23	17	24V	15W	11W	110 x 33 x 21	IP65



Datasheet download

 Alimentatore per LED di potenza

- Specifici per Led Sharp serie Mini e Petite Zenigata
- Alimentatore indipendente - IP20 o IP65 - Classe II di isolamento
- Uscita in corrente costante 140mA... 640mA precisione 5%
- Protezione autoripristinante contro le sovratemperature, contro il circuito aperto ed i corto-circuiti sul secondario
- Alimentazione : 110÷240V/AC- Uscita stabilizzata

 Driver for High Brightness LEDs

- Specific for Sharp Led Mini and Petite Zenigata series
- Independent driver - IP20 or IP65 - Insulation class II
- Output in constant current 140mA... 640mA, 5% tolerance
- Self-resetting protection against overtemperatures, against open circuit and against output short circuits
- Input voltage: 110÷240V/AC- Steady output.

