

42-61
Watt

SELV

PF
 $\lambda \geq 0,95$

IP20



EMC

 $t_a -10^{\circ}\div +40^{\circ}\text{C}$ DALI
Dimmable

Part Number	Iout	Vout Led Min	Vout Led Max	W	Dimensions A x B x C	Protocol
A40PUL042BEB	250÷700mA	3V	84V	42W	103 x 68 x 30	0-10V / PUSH
A40PUL060AEB	800÷2000mA	3V	42V	61W	123 x 79 x 31	0-10V / PUSH
A40PUL042BBB	250÷700mA	3V	84V	42W	103 x 68 x 30	DALI / PUSH / 0-10V
A40PUL060ABB	800÷2000mA	3V	42V	61W	123 x 79 x 31	DALI / PUSH / 0-10V



Datasheet download





Alimentatore Multicurrent dimmerabile per LED

- Alimentatore indipendente - IP20 - Classe II di isolamento - SELV
- A40PUL042BEB e A40PUL060AEB: 0-10V/PUSH
- A40PUL042BBB e A40PUL060ABB: 0-10V/PUSH/DALI
- Memoria di regolazione anche in assenza di rete
- Uscita in corrente costante regolabile da 250 a 2000mA, $\pm 5\%$
- Protezione autoripristinante contro le sovratemperature, contro il circuito aperto ed i corto-circuiti sul secondario.
- Morsetti rapidi
- Alto fattore di potenza
- Pressacavo adatto a vari tipi di cavo, sia tondi che piatti
- Alimentazione: 200V ÷ 240V/AC - Uscita stabilizzata

Multicurrent dimmable LED Driver

- For independent mounting - IP20 - Insulation class II - SELV
- A40PUL042BEB and A40PUL060AEB: 0-10V/PUSH
- A40PUL042BBB and A40PUL060ABB: 0-10V/PUSH/DALI
- Memory of regulation even with mains not connected
- Output in constant current from 250 to 2000mA $\pm 5\%$
- Self-resetting protection against overtemperatures, open circuit and against output short circuits
- Fast terminals
- High power factor
- Cable clamp for flat and round cables
- Input voltage: 200V ÷ 240V/AC - Steady output



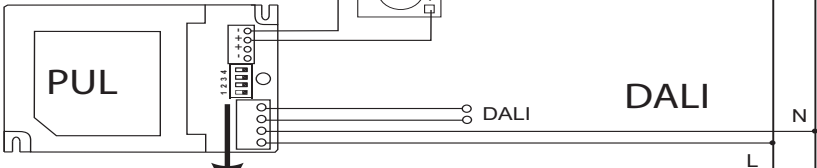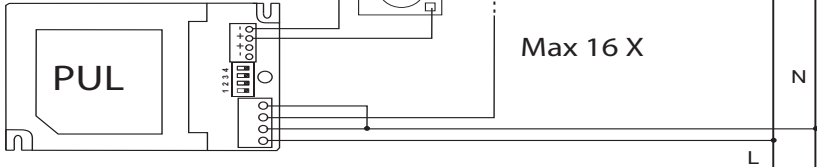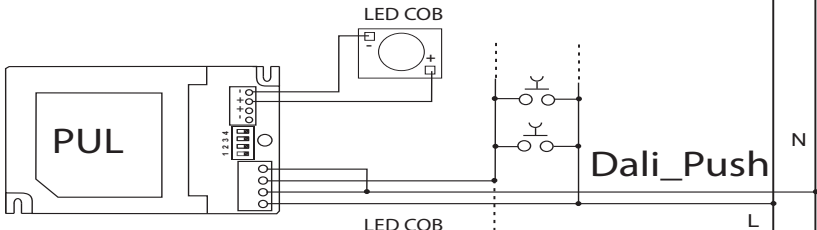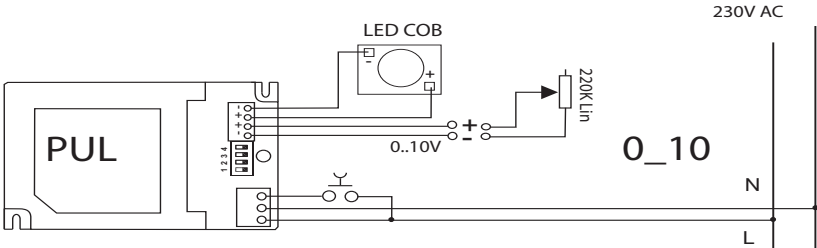

Switching selection sheet							
PIN	Irated	Output Voltage	Prated	1	2	3	4
24W	250mA	3-84VDC	21W	ON	ON	ON	ON
29W	300mA	3-84VDC	25.2W	ON	ON	ON	ON
33W	350mA	3-84VDC	29.4W	ON	ON	ON	ON
38W	400mA	3-84VDC	33.6W	ON	ON	ON	ON
42W	450mA	3-84VDC	37.8W	ON	ON	ON	ON
47W	500mA	3-84VDC	42W	ON	ON	ON	ON
47W	550mA	3-76VDC	41.8W	ON	ON	ON	ON
47W	600mA	3-70VDC	42W	ON	ON	ON	ON
47W	650mA	3-64VDC	41.6W	ON	ON	ON	ON
48W	700mA	3-60VDC	42W	ON	ON	ON	ON

Before use, always check dipswitch settings!

Switching selection sheet									
PIN	Irated	Output Voltage	Prated	1	2	3	4	5	6
38W	800mA	3-42VDC	33.6W	ON	ON	ON	ON	ON	ON
43W	900mA	3-42VDC	37.8W	ON	ON	ON	ON	ON	ON
47W	1000mA	3-42VDC	42W	ON	ON	ON	ON	ON	ON
52W	1100mA	3-42VDC	46.2W	ON	ON	ON	ON	ON	ON
54W	1150mA	3-42VDC	48.3W	ON	ON	ON	ON	ON	ON
56W	1200mA	3-42VDC	50.4W	ON	ON	ON	ON	ON	ON
59W	1250mA	3-42VDC	52.5W	ON	ON	ON	ON	ON	ON
61W	1300mA	3-42VDC	54.6W	ON	ON	ON	ON	ON	ON
65W	1400mA	3-42VDC	58.8W	ON	ON	ON	ON	ON	ON
68W	1500mA	3-40VDC	60W	ON	ON	ON	ON	ON	ON
69W	1600mA	3-38VDC	60.8W	ON	ON	ON	ON	ON	ON
69W	1700mA	3-36VDC	61.2W	ON	ON	ON	ON	ON	ON
69W	1800mA	3-34VDC	61.2W	ON	ON	ON	ON	ON	ON
69W	1900mA	3-32VDC	60.8W	ON	ON	ON	ON	ON	ON
69W	2000mA	3-30VDC	60W	ON	ON	ON	ON	ON	ON

Before use, always check dipswitch settings!

PUL042

PUL060