




DALI2 DT8 RGB-AF



Datasheet download




Part Number	Protocol	Iout	Vout Min.	Vout Max.	Uout	W	Dimensions A x B x C
A40RGBBOX435B	DALI2 DT8/ PUSH/ DMX	250÷500mA	6V	50V	55V	90W	210 x 75 x 35

CABLAGGI:
 CABLING:



Page: 238

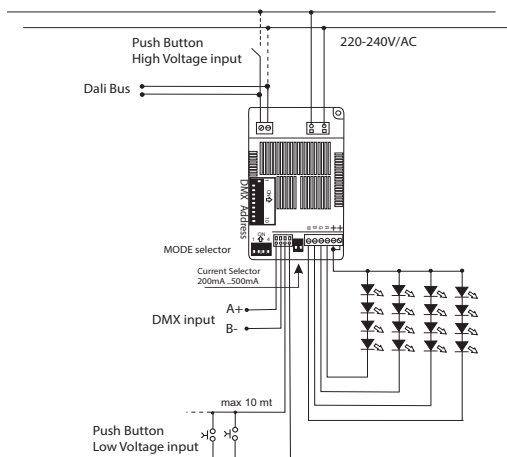

Alimentatore CC per LED RGB+W - 4 canali

- Alimentatore indipendente - IP20 - Classe II di isolamento
- Per LED RGB+W a corrente costante
- Uscita in corrente costante 250÷500mA, programmabile con DIP-switches
- Ingresso pulsante bassa tensione e ingresso pulsante alta tensione. Comando della luce - accensione, regolazione e spegnimento - con uno o più pulsanti
- Collegamento in parallelo fino a max 6 x RGBBox comandati dallo stesso pulsante senza limiti di lunghezza
- Ingresso DMX
- Ingresso DALI
- Morsetti rapidi
- Pressacavo adatto a vari tipi di cavo, sia tondi che piatti
- Alimentazione: 220÷240V/AC

RGB+W Led Driver in CC- 4 channels

- For independent mounting - IP20 - Insulation class II
- For RGB+W applications operating in constant current.
- Output in steady current: 250÷500 mA, settable by DIP-Switches
- Low voltage push button input and high voltage push button input. Light control - on, off and dimming - by one or more push-buttons (no limits of cable length)
- Parallel connection for max 6 x RGBBox controlled by the same push-buttons .
- DMX control
- DALI control
- Fast terminals
- Cable clamp for flat and round cables
- Input voltage: 220÷240V/AC

