

45÷55
Watt

CV

PF
λ ≥ 0,95

IP 20

EQUIV.
SELV

CE

EMC

M

M

F



110

ta -10°÷ +40°C

85 mm

Dimmable

DMX
Dimmable

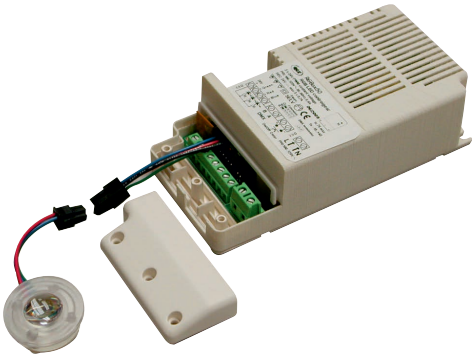

Part Number	Protocol	Output V	Output@230V I max 3ch	W @230V	Dimensions A x B x C
A40RGBOX450B	DMX / PUSH	12V	3 x 1,25A	45W	147 x 75 x 39
A40RGBOX550B	DMX / PUSH	24V	3 x 0,7A	55W	147 x 75 x 39



Datasheet download

Convertitori per LED di potenza in sistemi RGB

- Alimentatore indipendente - IP20 - Classe II di isolamento
- Ingresso pulsante bassa tensione. Comando della luce - accensione, regolazione e spegnimento - con uno o più pulsanti
- Ingresso DMX con funzione auto-test incorporata e LED di segnalazione
- Per LED di potenza RGB a tensione costante - Uscita 3 x 12/24V PWM
- Collegamento in parallelo fino a max 10 RGBOX

Converters for High Brightness LEDs in RGB systems

- Independent converter - IP20 - Insulation class II
- Low voltage push button input. Light control - on, off and colour regulation - by one or more push-buttons
- DMX input with self-test function and LED signal
- Suitable for RGB systems, constant voltage - Output 3 x 12/24V PWM
- Possible parallel connection up to 10 x RGBOX drivers

