





DALI Dimmable

Dimmable

Dimmable 1..10

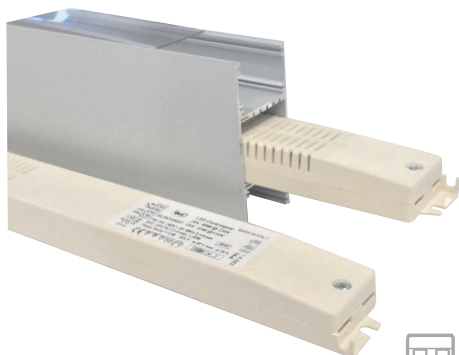

Part Number	Output V	Output@230V I max	W @230V	Output@110V I max	W @110V	Dimensions A x B x C	Protocol
A40SLBOX60DB	24V/DC	2,5A	60W	1,46A	35W	310 x 30 x 21	DALI / PUSH
A40SLBOX601B	24V/DC	2,5A	60W	1,46A	35W	310 x 30 x 21	1-10V



Datasheet download

Alimentatore LED dimmerabile DALI/1-10V/ Push

- Alimentatore indipendente - IP20 - Classe II di isolamento
- Modello SLBOX60D: Ingresso DALI +Push (con memoria di stato)
- Modello SLBOX601: Ingresso 1-10V. A richiesta, versione 0-10V
- Possibilità di sincronizzare più alimentatori
- Uscita in tensione costante 24V PWM
- Morsetti rapidi e doppio connettore di uscita
- Alimentazione: 110÷240V/AC - Uscita stabilizzata. A richiesta, alimentazione a 230VDC

Dimmable LED Driver DALI/1-10V/Push

- For independent use - IP20 - Insulation class II
- Type SLBOX60D: Input DALI +Push (state memory)
- Type SLBOX601: Input 1-10V. Control by 0-10V, on request.
- Possible synchronization of more drivers
- Output in steady voltage 24V PWM
- Fast terminals and double output connection
- Input voltage: 110÷240V/AC - Steady output. On request, input voltage 230VDC

