


Part Number	Output V	Output @230V I _{max}	W @230V	W @110V	Dimensions A x B x c	
A40ZBX10000B	24V	4,16A	100W	60W	210 x 75 x 35	•
A40ZBX15000B	24V	6,25A	150W	60W	210 x 75 x 35	•
A40ZBX10048B	48V	2,10A	100W	60W	210 x 75 x 35	

Bluetooth • ZBXT* On request
Zigbee • ZBX



Datasheet download

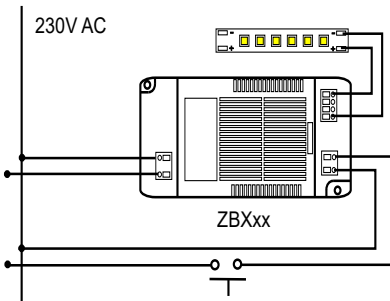

- Alimentatore LED Wireless - Zigbee +BLE +Push**
- Alimentatore indipendente - IP20 - Classe II di isolamento
 - Uscita in tensione costante 24V/48V, ±5%
 - Comando Zigbee 3.0 + Bluetooth Low Energy
 - Disponibile APP IOS/Android,
 - Comando a pulsante lato primario con possibilità di impianti multipli sincronizzati

- Wireless Led Driver – Zigbee+BLE +Push**
- For independent mounting – IP20 – Insulation class II
 - Output in steady voltage 24V/48V, ±5%
 - Zigbee 3.0 + Bluetooth Low Energy control
 - APP IOS/ANDROID available
 - Push control on the primary side with possible multiple connection by synchro.