


Part Number	Input V	Output V	Output I max	Output V max	W	Dimensions A x B x C
A40ZCUBE240N	24V/DC	24V/DC	11A	Vin-0,5V	264W	41 x 47 x 20
A40ZCUBE480N	48V/DC	48V/DC	7A	Vin-0,5V	336W	41 x 47 x 20

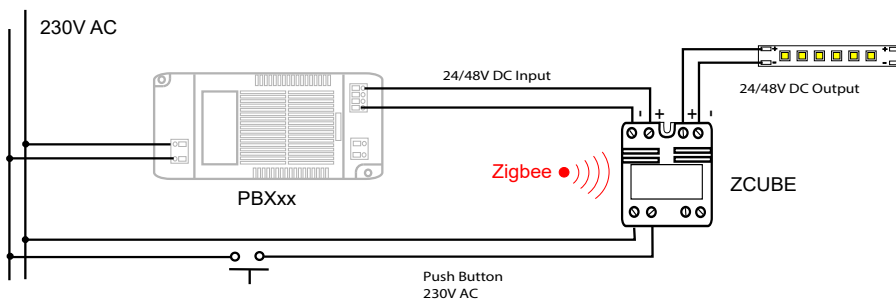

Datasheet download

Interfaccia LED Wireless Zigbee+BLE +Push

- Uscita in tensione costante PWM 250Hz
- Comando Zigbee 3.0 + Bluetooth Low Energy
- Disponibile APP IOS/Android
- Ingresso PUSH isolato
- Protezione al corto-circuito
- Comanda carichi resistivi fino a 11A

Wireless Led Interface Zigbee+BLE + Push

- Output in steady voltage PWM 250Hz
- Zigbee 3.0 + Bluetooth Low Energy control
- APP IOS/ANDROID available
- Isolated Push input.
- Short circuit protection
- For resistive loads up to 11A