


12/20
Watt/m

IP 20


CRI>80



t_a -10°÷ +40°C

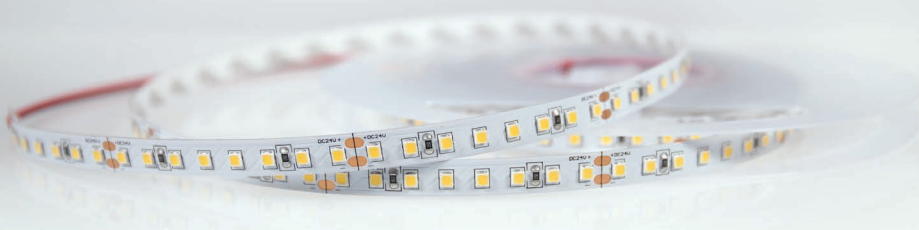

up to
150 lm/w

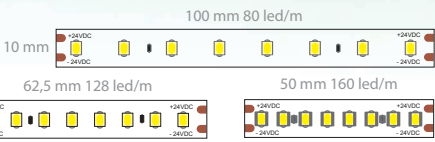

Part Number	CCT (K)	Lumen/m	Ra	LED/m	V (Typ)	Cut	W/m	IP	EEC*
A41B24080027	2700K	1660	85	80	24V/DC	100mm	12W	IP20	E
A41B24080030	3000K	1740	86	80	24V/DC	100mm	12W	IP20	E
A41B24080040	4000K	1840	88	80	24V/DC	100mm	12W	IP20	D
A41B24128027	2700K	2280	85	128	24V/DC	62,5mm	16W	IP20	E
A41B24128030	3000K	2310	87	128	24V/DC	62,5mm	16W	IP20	E
A41B24128040	4000K	2350	88	128	24V/DC	62,5mm	16W	IP20	D
A41B24160027	2700K	2850	85	160	24V/DC	50mm	20W	IP20	E
A41B24160030	3000K	2970	87	160	24V/DC	50mm	20W	IP20	D
A41B24160040	4000K	3070	88	160	24V/DC	50mm	20W	IP20	D

** The EEC specification refers in each case to the installed light source(s)



Datasheet download

Strisce flessibili a LED 24V autoadesive IP20

- LED 2835 ad alta efficienza e a bassa caduta di tensione
- Realizzata in moduli da 8 LED per una diminuzione delle perdite in calore e migliore resa luminosa
- Consumo ridotto, alto rendimento
- Disponibile nei colori standard 2700K, 3000K e 4000K
- Fornite in nastro da 5m e cavetto di raccordo.

24V Flexible adhesive LED strips IP20

- LED 2835 with high lumen efficiency and low voltage drop
- 8LED segment for a reduction of heath losses and higher lumen efficiency
- Reduced consumption, higher efficiency
- Available in standard 2700K, 3000K and 4000K
- Supplied in 5m roll with connecting cable

